

HVH

Horizontal or Vertical Discharge Fan Forced Unit Heater *(cont'd.)*


Thermostat Kits (40-90°F)

Model	Rating	PCN	Stock	Wt. (Lbs.)
TK-5	SPST	219475	S	0.25
TK-6	DPST	219483	S	0.25

Power Disconnect Kit (3 Pole 600V)


Model	Rating	PCN	Stock	Wt. (Lbs.)
HDS-1	50 Amps	219491	S	0.5

Horizontal Discharge

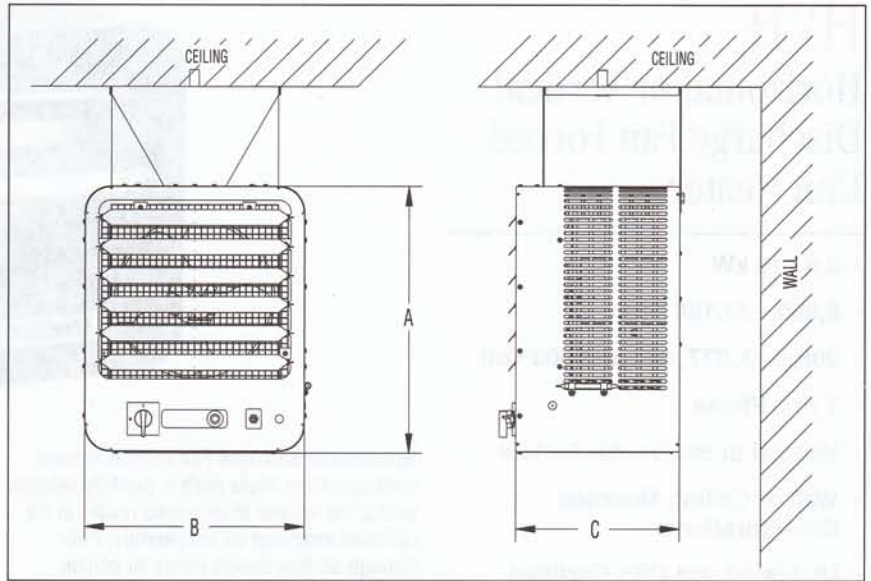

Heater	Dimensions (In.)		
	A	B	C
HVH-02 to 05	16-1/8	13	10
HVH-07 to 05	20-5/8	17-1/8	12-3/4

Rod Thread Type and Spacing Dimensions for Horizontal discharge

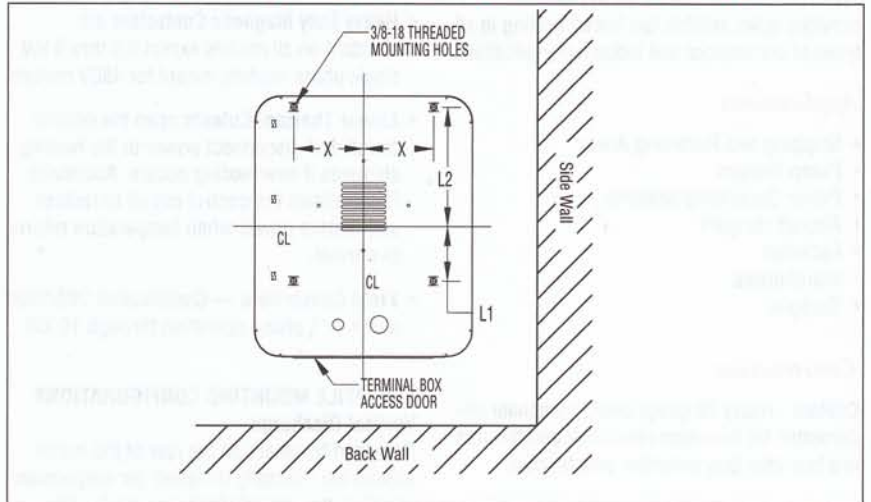

Unit	Rod Thread Type	Dimensions (In.)		
		L ₁	L ₂	X
2-5 kW	3/8 - 16	2-7/8	7-1/8	3-3/4
7-1/2 - 15 kW	3/8 - 16	4-5/16	9-3/8	5-1/2

Mounting Limitations

Hazardous Atmosphere — Unit heaters should not be used in potentially explosive atmospheres. **Corrosive Atmosphere** — The finish is not intended for direct salt spray exposure in marine applications or the highly corrosive atmospheres of greenhouses, swimming pools, chemical storage bins, etc. **Mounting Height** — Do not install unit heaters above recommended maximum mounting height. Obstructions must not block unit heater air inlet or discharge.