

Infrasave

IL Luminous Commercial/Industrial



Infrasave

IQ Commercial/Industrial

IR Garage/Workshop



IW Car Wash and Harsh Environment.

Infrasave



Patio Portable, post and wall or ceiling mount.

Infrasave

IC-90 Portable Construction Heater.



ITT Series Specifications



DIMENSIONS AND SPECIFICATIONS

MODEL	CAPACITY (BTU/HR) U.S.A.* SEA LEVEL TO 2,000' CANADA: SEA LEVEL TO 4,500'	AVAILABLE LENGTH				
		20'	30'	40'	50'	60'
ITT-200/140**	200,000 / 140,000				✓	✓
ITT-175/125**	175,000 / 125,000				✓	✓
ITT-155/110	155,000 / 110,000			✓	✓	
ITT-130/90	130,000 / 90,000		✓	✓		
ITT-110/75	110,000 / 75,000		✓	✓		
ITT-80/60	80,000 / 60,000	✓	✓			
HEATER LENGTH		21"	30'8"	40'4"	50'	59'8"
SHIPPING WEIGHT (LBS.)		120	160	200	240	280


MODEL	CAPACITY (BTU/HR) U.S.A.* SEA LEVEL TO 2,000' CANADA: SEA LEVEL TO 4,500'	AVAILABLE LENGTH		
		10'	20'	30'
ITTU-200/140**	200,000			✓
ITTU-175/125**	175,000			✓
ITTU-155/110	155,000		✓	✓
ITTU-130/90	130,000		✓	
ITTU-110/75	110,000		✓	
ITTU-80/60	80,000	✓		
HEATER LENGTH		12'-9"	22'-3"	31'11"
SHIPPING WEIGHT (LBS.)		135	230	335

*U.S.A.: SEA LEVEL TO 2,000FT ; de-rate heater 4% for each additional 1000ft of elevation
**ITT(U) 200/140 & 175/125 Available in Natural Gas only

Gas Connection	1/2" NPT	
Manifold	3.5" W.C. N.G.	10" W.C. L.P.
Electrical	120 VAC, 60 HZ	
Tube, Combustion Air, Vent	4" Diameter	

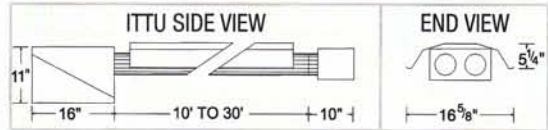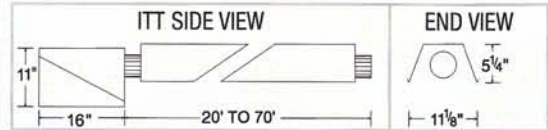


CLEARANCES TO COMBUSTIBLES

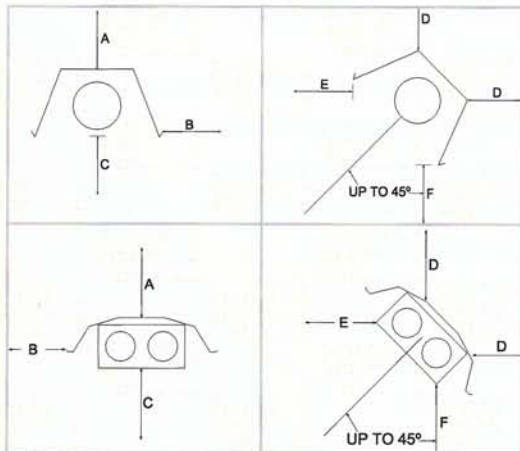

MODEL	SUSPENDED HORIZONTALLY			SUSPENDED AT AN ANGLE UP TO 45°		
	A	B	C	D	E	F
ITT(U) 200/140	7"	22"	68"	7"	57"	68"
ITT(U) 175/125	6.5"	20"	68"	6.5"	47"	68"
ITT(U) 155/110	6"	19"	64"	6"	44"	64"
ITT(U) 130/90	4"	11"	60"	5"	35"	56"
ITT(U) 110/75	3"	9.5"	60"	4.5"	26"	54"
ITT(U) 80/60	7"	22"	68"	7"	57"	68"

FLEXIBLE LAYOUT

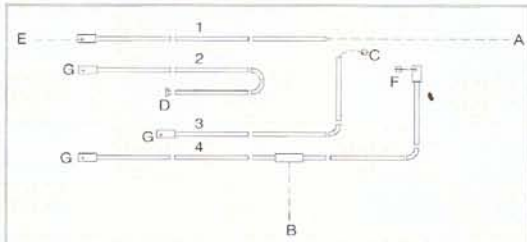

System Configuration

1. Straight line
2. "U" Tube with 2 90° elbow kits
3. "L" Tube with 90° elbow kit
4. Common 6" TEE flue vent

Venting Options

- A. Flue Vent through wall 4"
- B. Common Flue Vent through wall or roof 6"
- C. Flue Vent through roof
- D. Flue Vent into building, exhaust fan interlocked with heater
- E. Combustion air intake from outside through wall
- F. Combustion air intake from outside through roof
- G. Combustion air intake from inside building

Infrasave
radiant heaters

Mississauga, Ontario ~ Waynesboro, Georgia
Phone: 1-866-INFRASV (463-7278)
Fax: 1-866-724-9265
www.infrasave.com info@infrasave.com